



Installation Guide

Accessories

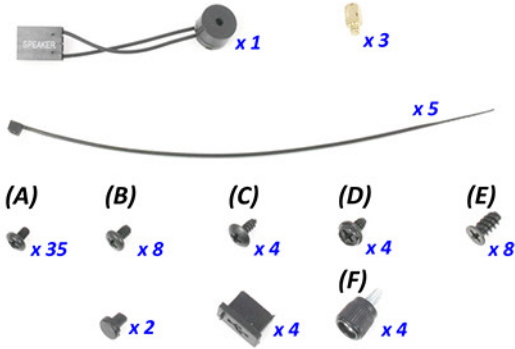

Mounting set and screws

Open side panel

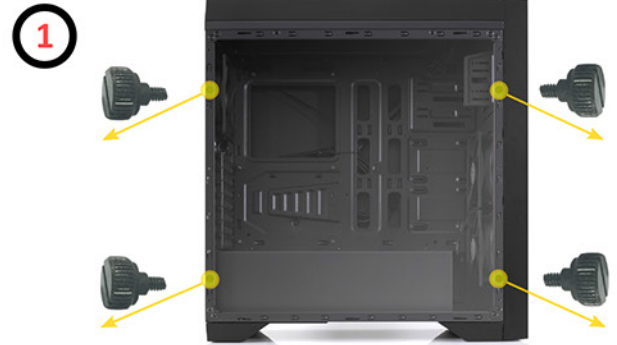

Unscrew and remove the side panel

HDD



Insert the HDD into the dedicated mounting tray

HDD



Slide the HDD into the HDD cage

PSU



Position the PSU on the bottom of the case with the fan facing downwards

PSU



Secure the PSU with (D) or (B) screws

EPS cable



Lead the EPS cable through the dedicated hole


ATX Cable



Lead the ATX cable through the dedicated hole


Installation Guide

Motherboard

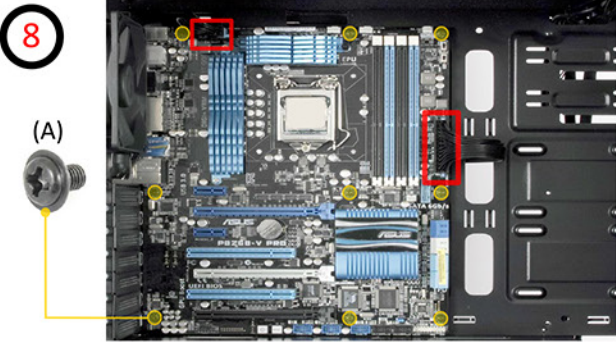

Install motherboard's I/O shield, put motherboard on standoffs, secure it with screws (A) and then plug EPS and ATX cable

Cable managem

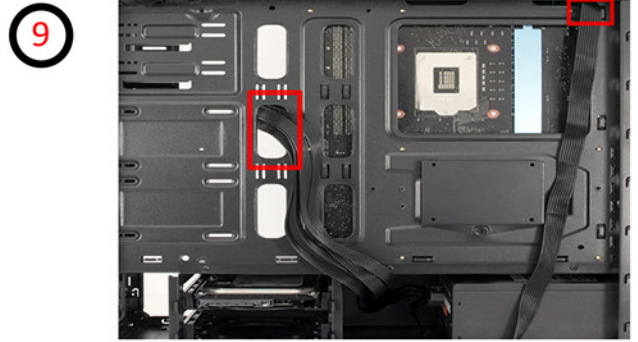

Cable management for EPS and ATX cable

SSD #1, #2




Secure the SSD in dedicated place using four screws (A)

SSD #1, #2




SSD location

SSD #3

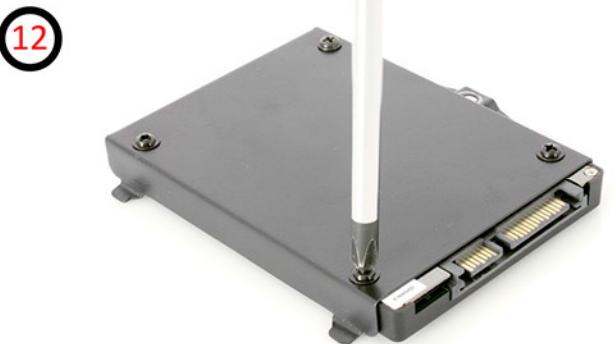


Place the SSD in the dedicated tray and secure it using four screws (A)

SSD #3

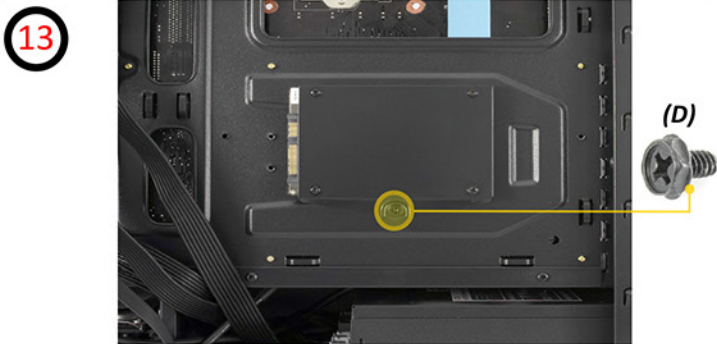


Secure the SSD tray in dedicated place using one screw (D)

USB 2.0

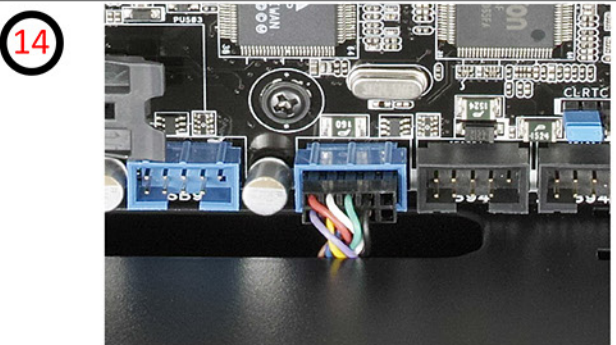

Plug in USB 2.0 connector to the motherboard

USB 3.0

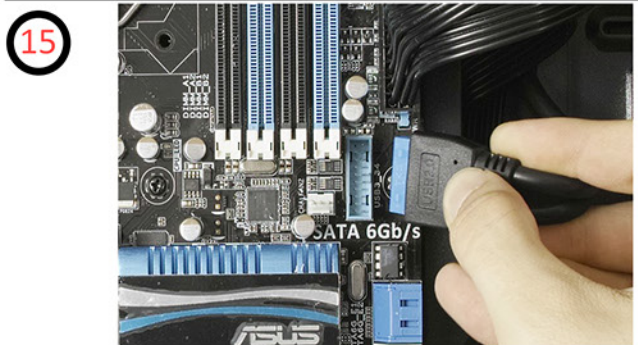

Plug in USB 3.0 connector to the motherboard

Installation Guide

GPU

16


(F)



Install the GPU in the PCI-E slot on the motherboard and secure it with (F) or (B) screws

GPU


17

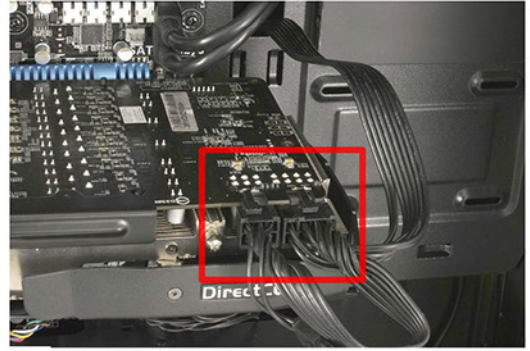

Plug in the PCI-E connectors to the GPU

Audio

18

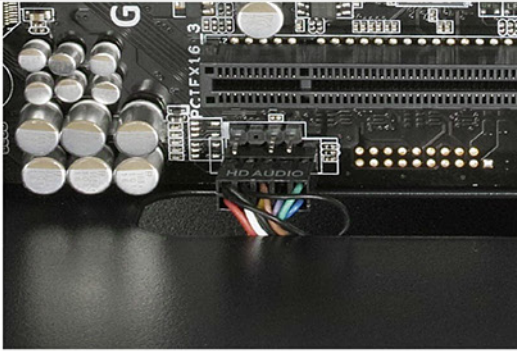

Plug in audio connector to the motherboard

ODD

19



Remove the front 5.25" drive bay cover, then slide the ODD into the drive bay and secure it with screws (A)

Optional fans

Top remove



Push the top fan cover in the designated spots to release the locking mechanism

Top remove



Remove the top cover

Top fans (120 mm)



Install the 120 mm fans using dedicated screws (E)

Top fans (140 mm)



Install the 140 mm fans using dedicated screws (E)

Installation Guide

Additional features

Fan speed switches



Two built-in fan speed switches

Fan controllers



Plug the power connector from the fan controller to the 4-pin molex connector from the PSU

Fan controllers



Plug in the 3-pin fan connector to the dedicated connector on the fan controller

Fan controller




Place the fan controller within the computer case

Audio and USB ports covers



Dust-proof covers for USB and audio ports

Rear fan position

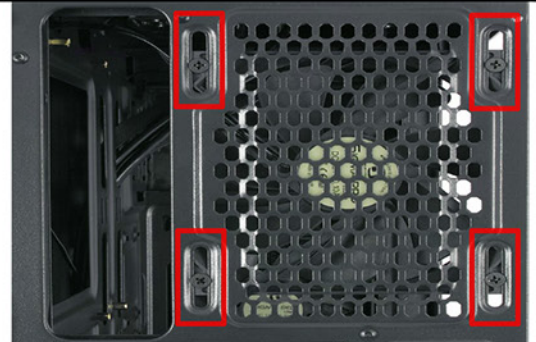

Rear 120 mm fan position is vertically adjustable

Securing the front panel



Secure the front panel using dedicated screws (C)